


## HEAVY DUTY Cane Bolt for Swing Gates

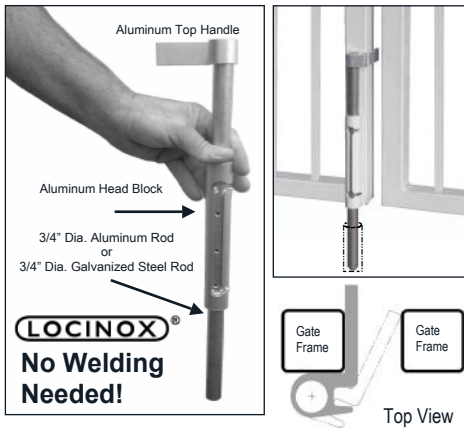

**LOCINOX®**  
**No Welding Needed!**

- \* Easy to install on existing gates.
- \* No padlock needed, top handle gets trapped between the double gates when the gate is in the closed position.
- \* Galvanized steel or aluminum rod 3/4" Dia.
- \* Height adjustable to 4", 5-1/2" Throw.
- \* Quick Fix Mounting (fits all square posts, 1-1/2" minimum).
- \* Easy "Quick-Fix" fasteners included.
- \* Bolt - 19-1/4" L. ~ Top Handle - 2-1/2" L. ~ Head Block - 7-7/8" L.
- \* Adaptor for round posts available - use adapter #6403.

Part #	Description	Wt.
LOCVSAQFAL	Aluminum Finish with Aluminum Rod 3/4" Dia.	1.5 lbs.
LOCVSAQFBL	Black Finish with Aluminum Rod 3/4" Dia.	1.5 lbs.
LOCVSPQFAL	Aluminum Finish with Galvanized Rod 3/4" Dia.	3 lbs.
LOCVSPQFBL	Black Finish with Galvanized Rod 3/4" Dia.	3 lbs.

## Mechanical Cane Bolt Padlock Feature - 1/2" & 3/4" Dia. Plain Steel Finish or Zinc Plated Finish




Length: 25-1/2"  
Throw: 6-1/2"  
Mounted on a  
1" x 1/8" Flat Bar

**GH122M 1/2**  
1/2" Diameter Bolt Plain Finish  
Wt. 1.75 lbs.

**GH122M 1/2PL**  
1/2" Dia. Bolt Zinc Plated Finish  
Wt. 1.75 lbs.

**GH122M 3/4**  
3/4" Diameter Bolt Plain Finish  
Wt. 3.5 lbs.

**GH122M 3/4PL**  
3/4" Dia. Bolt Zinc Plated Finish  
Wt. 3.5 lbs.

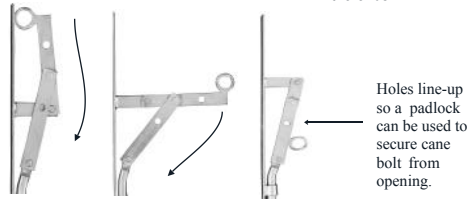

Holes line-up so a padlock can be used to secure cane bolt from opening.

## LOKK-BOLT Security Drop Bolt



Special retention grooves mean the bolt won't drop and drag.

This key-lockable device comes in two lengths (18" and 24") and is quick and simple to install on all gate and fence materials. It is equally as effective on pedestrian gates as it is on double-drive gates. Clever bolt retention grooves mean this cane-bolt will never drop, drag, bend or grind across driveways! 316 stainless steel rod.

**LLCB18**

18" x 9/16" Dia. Bolt  
Wt. 2.75 lbs.

**LLCB24**

24" x 9/16" Dia. Bolt  
Wt. 3.25 lbs

Lokk-Bolt models are now all keyed-alike. Kwikset keyway.

Models for wood and vinyl gates available.



**Optional Base Plate**  
Sold Separately - 4-3/4" Dia.  
Special Order.

**LBBPBG**

## Standard Cane Bolt Cadmium Finish 12", 18" & 24" Lengths



1/2" Diameter bolt

**GH12212**

12" x 1/2" Dia. Bolt  
Wt. 1.10 lbs.

**GH12218**

18" x 1/2" Dia. Bolt  
Wt. 1.5 lbs.

**GH12224**

24" x 1/2" Dia. Bolt  
Wt. 1.65 lbs.

Brackets are plain steel

## The Gate Stop "Soft & Quiet"

The GATE-STOP is the ideal gate alignment device for preventing hinge, latch and gate damage, and for prolonging gate life. For gates higher than 4 ft, two GATE-STOPS may be required. Black Finish. White Color Available Special Order.



**TCGS3**

**For Metal Gates**  
3-5/8" H. x 2-7/16" W.  
Wt. 0.25 lb.



Rubber Shock Absorber

**TCGS1**

**For Vinyl Gates**  
4-3/4" H. x 5-1/4" W.  
Wt. 0.50 lb.

## Gate Handle



The Lokk-Latch 'GATE-HANDLE' is a general-purpose device designed to fit all types of gates and gate materials. It offers the simple convenience of gate opening and closing for most commercial and household gate applications. Made with a strong glass-reinforced polymer construction. The Gate Handle fits left or right handed gates. Fits Metal, Vinyl or wood gates. Black Finish. White Color Available Special Order. Wt. 0.25 lb.



**LLHBG**

5" H. x 1-1/4" W. x 1-1/2" D.