


2200 & 9800 Series Rim Type Exit Device For 36" or 48" Doors / Flat Touchbar (ANSI A.156.3 Grade 1)



2200 Series

Also Available:
DORMA
VON DUPRIN
VON DUPRIN - Substitutes

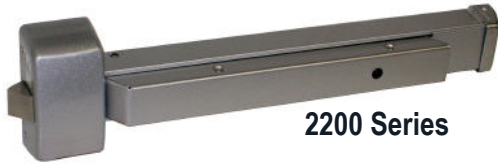

Part #	Description	Wt.
CR2200EO36AL	Rim Type Exit Only - 36"	8 lbs.
CR2200EO48AL	Rim Type Exit Only - 48"	9.5 lbs.
CR9800EO3632D	Rim Type Exit Only - 36"	11 lbs.
CR9820EO4832D	Rim Type Exit Only - 48"	12 lbs.

Specifications	
UL Listed for Panic and ULC10C, UBC 7-2-1997 codes.	
Hand	Non-Handed
Latch Bolt	Standard steel 3/4" throw
Rail Assembly	Heavy gauge steel, painted
Dogging Feature	Hold open feature - Allen-type key for non-fire devices
Spring	Stainless steel throughout
Door Size	36" and 48" doors
Finish	Aluminum
Non-Fire Rated	Fire Rated Available - Up to 3 hour fire



9800 Series



Rim Type Exit Device with K-BX458175 - Box Inside View of a Installed Exit Device

Dogging Feature Allen-Key Furnished Holds Latch Open

Option 1



K-BX458175 - Box

Option 2



Outside Trim Lever with K-BXEDCR - Box

Option 3



Outside Trim Cylinder with K-BXEDCR - Box

Weldable Box For 2200 Series Rim Type Exit Device



Plain steel box for 2200 Series Exit Device 36" or 48"
Dimensions:
4.5" x 8" x 1.75"
Rectangular Weldable Gate Box - No Holes
Material: 14 ga.
Wt. 2.5 lbs.

K-BX458175


Weldable Box For Outside Trim Lever



Steel box for outside lever application
CRSTR05LX26D,
CREN00LX26D and
CR2200NLAL
Dimensions:
5-3/4" W. x 8" H. x 1-3/4" D.
Material: 14 Ga.
Wt. 2.6 lbs.

K-BXEDCR

Outside Trim Cylinder Design



Outside by pull and key. Key retracts latchbolt.
Storeroom: Key operates lever, otherwise always locked. Use K-BXEDCR box with only three holes to be drilled.
Wt. 1.2 lbs.

CR2200NLAL

Outside Trim Lever Design



Schlage Keyway

Use K-BXEDCR Box

Storeroom: Key operates lever, otherwise always locked. Wt. 3 lbs.


CRSTR05LX26D

Entrance: Key retracts latchbolt, unlocks lever. Wt. 3 lbs.

CREN00LX26D

Heavy Duty Mechanical Lock

To be used with CR9800 Exit Devices



- * Grade 1 Panic Exit Device
- * Front cylinder change.
- * Up to 8,000 code combinations.
- * Weather-resistant finish (26D)
- * Code can be changed anytime without dismounting.
- * Reversible Handing
- * Key override.

CRCODE101



Use Blank Box #K-BX515175
Type: Blank x 14 ga.
5" W x 15" H x 1 3/4" D

Electric Strike Release For Rim Type Panic Bars



Features: 300,000 Life cycles, Holding Force 1200 lbs., Die Cast Case, Heavy Duty Latch Spring, Mortise Type - Backset 1-5/8" Deep, and Fail Secure (standard action) 24 VAC. Satin Chrome - US26D. Fits the Weldable 7140BOX with some slight modification to release. Wt. 1 lb.

Face Plate- 1-1/4" x 4-7/8"
Solid Cast Latch - Chrome plated,
Cavity Depth 9/16", Width 9/16",
Height 9/16", Height 1-17/32".

TR012C24



The 7140BOX needs slight modification to except the TR012C24 VAC electric release.
(Dim: 9" H. x 2" D. x 2" W.)
Wt. 1.25 lbs.

7140BOX

Trine EN-800 Electric Strike

Works With 2200 Series Rim Type Exit Device



EN-800 Face Plate - 1-11/16" X 9" X 3/4"
FAIL SECURE - NORMALLY LOCKED (Unlocked when energized)
Units with AC coils are for Fail Secure (Intermittent duty) use only and should be energized for periods of less than one minute.
All Stainless Steel Construction.
Mounting and Mechanism Holes Permit Horizontal Adjustment for Ease of Installation. 45° Face Plate Ramp - Standard Feature for Deadlocking Latch and Pins. Holding Force - 2000 lbs. UL tested. Durability - 1,000,000 Life cycles. Field Adjustable - Left or Right Handing In Minutes. Current amps .37, OHMS 18.0
Voltage: 24 VAC Wt. 0.75 lb.

TREN80024