




Magnetic Gate Lock

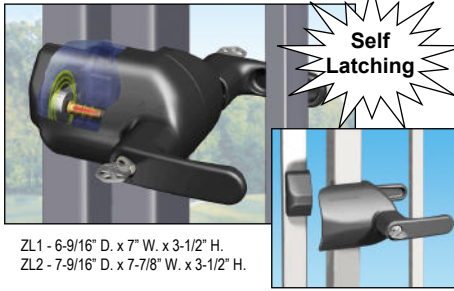

Self Latching

ZL1 - 6-9/16" D. x 7" W. x 3-1/2" H.
ZL2 - 7-9/16" D. x 7-7/8" W. x 3-1/2" H.

Installs in Minutes / No Rust or Corrosion Ever!

The patented magnetic self-latching Z-LOKK can simultaneously open or lock the gate from either side of the fence. Its 6-pin security locks can be conveniently re-keyed (by a locksmith) to match other Kwikset household door locks. Fits right or left hinged gates. Fully adjustable. No welding or hole drilling required.

- ZL1** For gate frame widths of: 1" - 1-5/8" **Not suitable use for child safety gates.**
- ZL2** For gate frame widths of: 1-3/4" - 2-1/2"

MAGNA-LATCH "SIDE PULL" Model



MLSP

Stylish dress caps included

MAGNA-LATCH Side Pull general-purpose gate latches offer a simple and effective latching solution for gates around homes and gardens, with over 3/8" in vertical and horizontal adjustment for easy installation. These quality latches have no mechanical interference to closure, offering unprecedented reliability, safety and child resistance.

Old Fashion Gate Latch Painted Gloss Black Finish



Length: 5"
Width: 5-1/4"

OFGL

Top Mounted Thumb Latch Painted Gloss Black Finish



Length: 6"
Width: 1-3/4"

GH102

1/2" Dia. Slide Bolt Plain Steel Finish



Height: 3"
Width: 3-3/16"
14 Gauge
2" Throw
1/2" Pin Dia.

GH103

The Gate Stop "Soft & Quiet"



TCGS1

For Vinyl Gates
4-3/4" H. x 5-1/4" W.




TCGS3

For Metal Gates
3-5/8" H. x 2-7/16" W.

The GATE-STOP is the ideal gate alignment device for preventing hinge, latch and gate damage, and for prolonging gate life. For gates higher than 4 ft, two GATE-STOPS may be required.

Color: Black or White

Swing Gate Support Wheel



- * 16" H. x 5" W.
- * Spring Loaded Wheel
- * Swivel Bearing Caster
- * Helps to Support Swing Gates
- 1" Dia. x 5-3/4" Tall Spring
- 1/2" Rd. Diameter Steel Rod
- 3" Rubber Wheel
- 3" x 4" Cover Base Plate

SPRWHEEL

Old World Latch Plain Metal Finish



Height: 3-3/16"
Width: 5-3/8"

170/B/5

Gate Handle



Made with a strong glass-reinforced polymer construction. The Gate Handle fits left or right handed gates. 5" H. x 1-1/4" W. x 1-1/2" D. Fits Metal, Vinyl or wood gates

LLHBG

Color: Black or White



NO RUST NO STAIN Fits wood, vinyl or metal gates

Mechanical Cane Bolt Padlock Feature - 1/2" & 3/4" Dia. Plain Steel Finish or "NEW" Zinc Plated Finish



Length: 25-1/2"
Throw: 6-1/2"

GH122M 1/2

1/2" Diameter Bolt Plain Finish

GH122M 1/2PL

1/2" Dia. Bolt Zinc Plated Finish

GH122M 3/4

3/4" Diameter Bolt Plain Finish

GH122M 3/4PL

3/4" Dia. Bolt Zinc Plated Finish

Mounted on 1" x 1/8" Flat Bar

Old Fashion Gate Latch Cadmium Finish 12", 18" & 24" Lengths



1/2" Diameter bolt

GH12212

12" x 1/2" Dia. Bolt

GH12218

18" x 1/2" Dia. Bolt

GH12224

24" x 1/2" Dia. Bolt

Brackets are plain steel

LOKK-BOLT Security Drop Bolt



This key-lockable device comes in two lengths (18" and 24") and is quick and simple to install on all gate and fence materials. It is equally as effective on pedestrian gates as it is on double-drive gates. Clever bolt retention grooves mean this cane-bolt will never drop, drag, bend or grind across drive-ways! 316 stainless steel rod.

Models for wood and vinyl gates available.

LB118BX

18" x 9/16" Dia. Bolt

LB124BX

24" x 9/16" Dia. Bolt

Optional Base Plate Sold Separately - 4-3/4" Dia.

Lokk-Bolt models are now all keyed-alike. Kwikset keyway.

LBPPBG

4" and 6" Wheel Boxes

11 Ga. Thick, 9/16" Dia. Hole
Fits Cast Iron V-Groove Wheels
For 2-1/2" Hub Width Wheels



Height: 3"
Width: 5"
Depth: 2-3/4"

VGRSTDBOX



Height: 4"
Width: 7"
Depth: 2-3/4"

VGRSTD6BOX

**4" V-Groove
Wheel Box**
For 1-1/2" & 1-3/4"
Wide Wheels
With 2" Hub Width



Height: 3-1/8"
Width: 4-7/8"
Depth: 2-1/4"

VGRSLBOX

**V-Groove
Mounting
Plates**



6-1/2"

6-1/2" H. x 4" W.
11 Gauge
Hole Dia: 9/16"

VGRMP

Rubber Guide Rollers 3", 6" & 12"
With Weldable Mounting Bracket
and Roller Bearings

All rollers include axle, bearings, nuts and bracket (1-3/8" W. x 9 ga.)



GR3KT

3" Height x 2-1/2" Dia. Roller
Total Offset 2-7/8"

GR6KT

6" Height x 2-1/2" Dia. Roller
Total Offset 2-7/8"

GR12KT

12" Height x 2-1/2" Dia. Roller
Total Offset 2-7/8"

Hard Plastic Guide Rollers 3", 6" & 12"
Non-Marking Plastic. U.H.M.W.
With Weldable Mounting Bracket

All rollers include axle, locknut, and bracket (1-1/2" W. x 8 ga.)



GR3KTPL

3" Height x 1-3/4" Dia. Roller
Total Offset 2-1/8"

GR6KTPL

6" Height x 1-3/4" Dia. Roller
Total Offset 2-1/8"

GR12KTPL

12" Height x 1-3/4" Dia. Roller
Total Offset 2-1/8"

**Heavy Duty Double
Non-Marking Guide Rollers**
For 2" Wide Gate Frames
6" & 12" Hard Plastic U.H.M.W.



6" Removable
White Rollers.
Angle Bar Frame
3/16" x 1-1/2"
Stainless Steel Axles

DR6



Two 6" Removable
White Rollers.
Angle Bar Frame
3/16" x 1-1/2"
Stainless Steel Axles

DR12

Gate Stop

With Hard Plastic
Non-Marking U.H.M.W. Liner
For 2" Wide Gate Frames



3/8" Thick
2-3/16" Height
5-3/4" Wide
3-3/4" Deep
Removable White Plastic
Liners U.H.M.W.

GS

**Light Duty Pipe 5" Track Wheel
Riveted Together & Galvanized**



PTW

For 1-5/8" O.D. Pipe
5/8" Dia. X 5" Bolt
Bracket Included

**Hard Plastic U.H.M.W.
5" Pipe Track Wheel**



PTWPL

For 1-5/8" O.D. Pipe
5/8" Dia. X 3" Bolt
Bracket Included
Bronze Sleeve
White Plastic

Heavy Duty 5" Pipe Track Wheel
Cold Rolled Hardened Steel
Sealed Bearings / Maintenance Free



PWRPTW

1-5/8" Pipe Slot
Weight Rating - 6000 lbs
5/8" Dia. X 6" Bolt
Maintenance Free
Zinc Plated Finish

**Galvanized Rolling Gate Wheel
For Chain Link or Ornamental Iron Gates**



RGW



6" Rubber Wheels
14-1/2" Wide
5/8" Dia. Axle
Fits 1-5/8" - 1-7/8" Pipe O.D. or
Welds to Square Tube.

**Nylon Cantilever Rollers
For Round and Square Posts**



CW4RD Shown

Part#	Description
CW3RD	For 3" Round Post
CW4RD	For 4" Round Post



**Cantilever Roller
Safety Cover**
Injected Molded High
Impact Polymer Casing

CWCOVER